



ترمینال ارت فونیکس

مدل | TB 10-PE




۰۲۱ ۶۶۷۵۶۲۳۱



www.alindas.com



خیابان سرهنگ سخایی ساختمان 44 طبقه سوم واحد 7

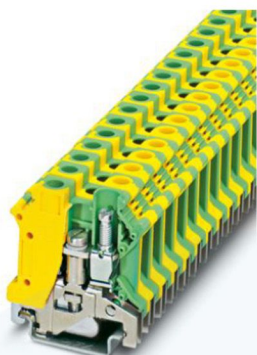

Technical data

Notes

General

Note	For a reliable contact of multi stranded conductors it is recommended to untwist multi stranded conductors.
------	---

Product properties

Product type	Ground terminal block
Product family	TB
Number of positions	1
Number of connections	2
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.82 W

Connection data

Number of connections per level	2
Nominal cross section	10 mm ²
Rated cross section AWG	6
Screw thread	M4
Note	Please observe the current carrying capacity of the DIN rails.
Tightening torque	1.2 ... 1.5 Nm
Stripping length	10 mm
Internal cylindrical gage	A6 B6
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	1.5 mm ² ... 16 mm ²
Cross section AWG	14 ... 6 (converted acc. to IEC)
Conductor cross section flexible	1.5 mm ² ... 10 mm ²
Conductor cross section, flexible [AWG]	14 ... 8 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	1.5 mm ² ... 10 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	1.5 mm ² ... 6 mm ²
Nominal cross section	10 mm ²